


12V DC		F29P-12E8001-12S				Suction-Aspirante			
		F29P-12E8001-12B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	700	410	5,9		660	390	5,8	
25	0,1	620	370	5,8		610	360	5,8	
50	0,2	510	300	5,5		530	310	5,8	
75	0,3	410	240	5,3		420	250	5,5	
100	0,4	380	220	5,6		320	190	5,5	
125	0,5	340	200	5,8		260	150	5,9	
150	0,6	280	170	6,0		200	120	6,1	
175	0,7	210	120	6,1		120	70	6,2	
200	0,8	170	100	6,2		50	30	6,4	
225	0,9	130	80	6,4		10	10	6,6	
250	1,0	60	40	6,6		0	0	6,7	
300	1,2	0	0	6,7					

24V DC		F29P-24E8001-12S				Suction-Aspirante			
		F29P-24E8001-12B				Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	700	410	2,9		630	370	2,8	
25	0,1	620	370	2,9		580	340	2,8	
50	0,2	500	300	2,7		540	320	2,9	
75	0,3	410	240	2,7		450	270	2,8	
100	0,4	380	220	2,8		330	190	2,8	
125	0,5	340	200	2,9		260	150	2,9	
150	0,6	290	170	3,0		210	120	3,0	
175	0,7	230	140	3,1		150	90	3,0	
200	0,8	180	110	3,1		70	40	3,2	
225	0,9	130	80	3,2		0	0	3,3	
250	1,0	70	40	3,3					
300	1,2	0	0	3,3					

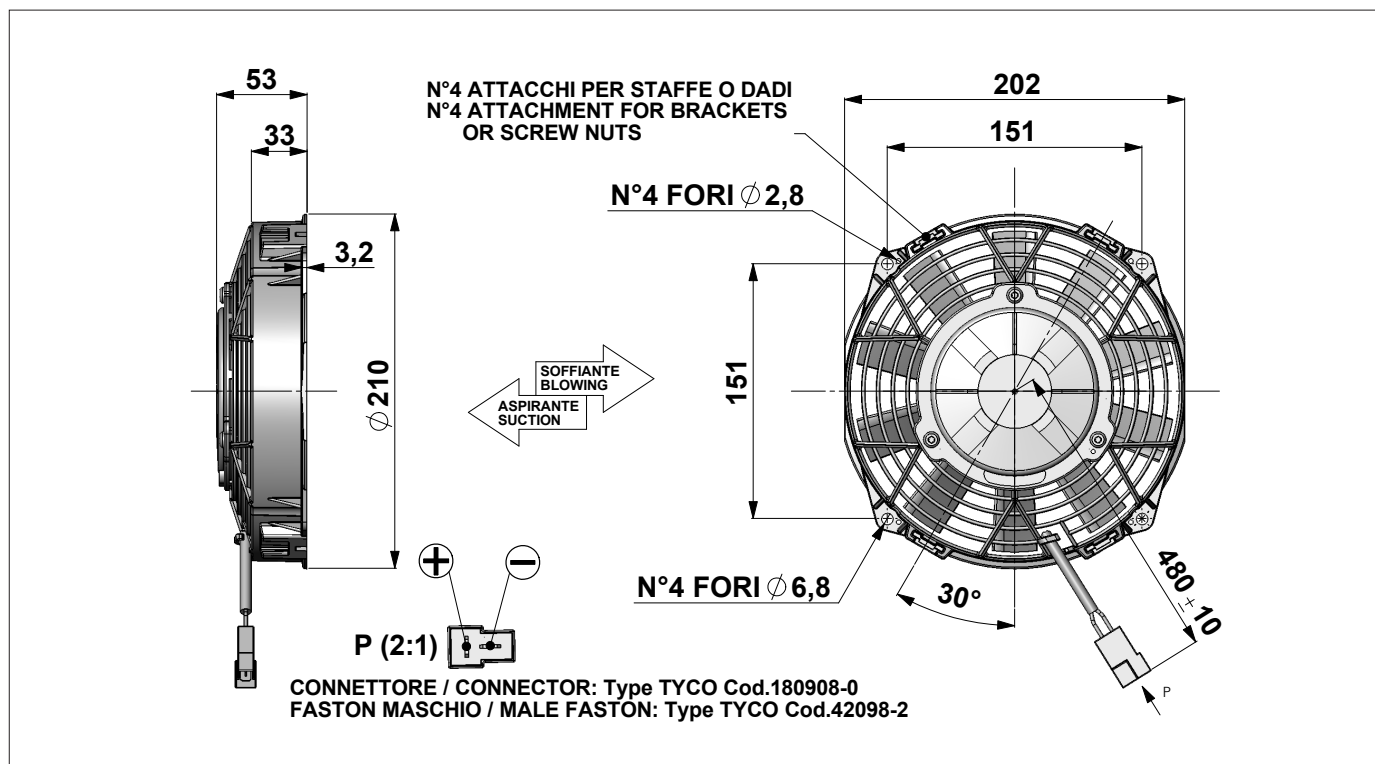

Weight: 1,1 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm