
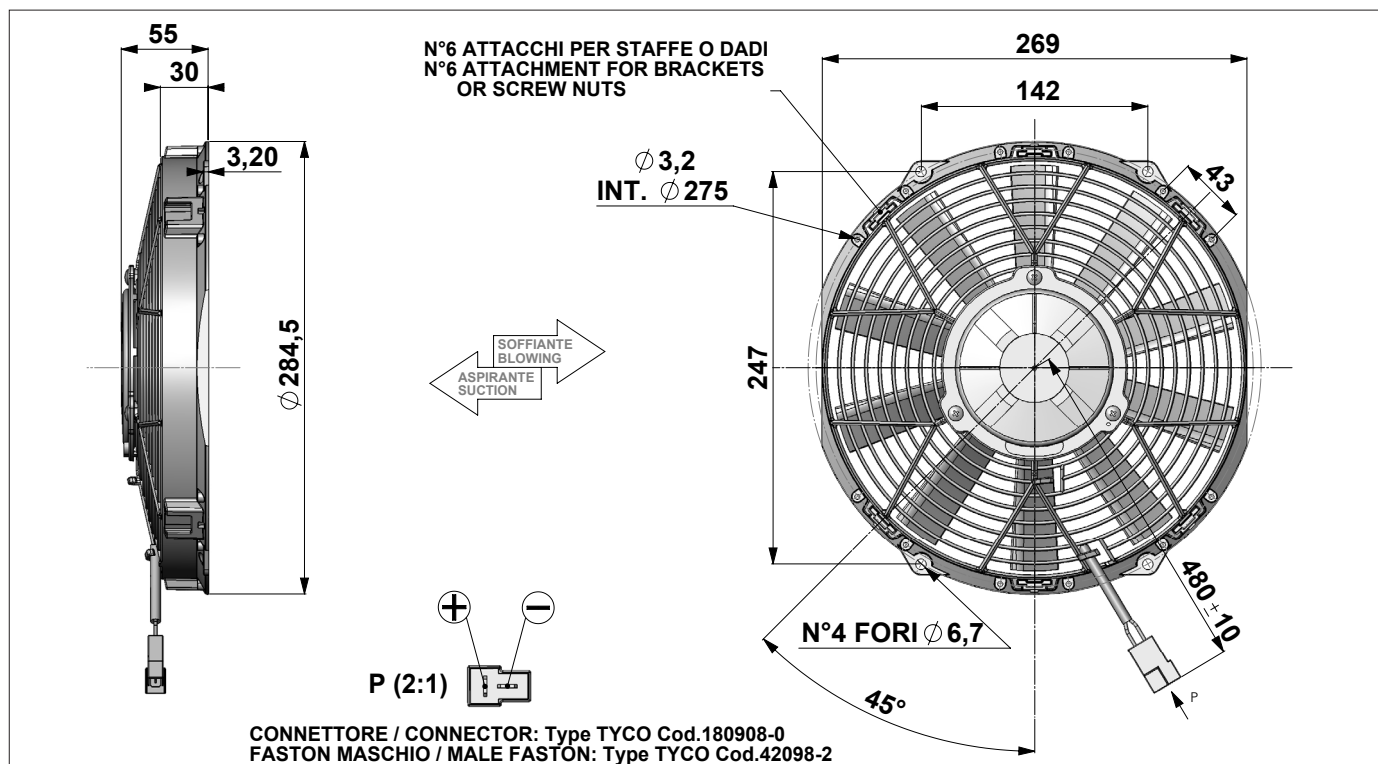



12V DC		F31P-12E8004-13S				Suction-Aspirante			
		F31P-12E8004-13B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	1440	850	6,8		1340	790	6,5	
25	0,1	1310	770	6,9		1210	710	6,5	
50	0,2	1170	690	6,9		1050	620	6,5	
75	0,3	1000	590	6,8		830	490	6,5	
100	0,4	760	450	6,6		620	370	6,6	
125	0,5	520	310	6,7		420	250	6,5	
150	0,6	330	190	6,9		150	90	7,1	
175	0,7	0	0	7,5		0	0	7,4	

24V DC		F31P-24E8004-13S F31P-24E8004-13B				Suction-Aspirante Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	1440	850	3,5		1350	800	3,3	
25	0,1	1320	780	3,5		1220	720	3,3	
50	0,2	1180	700	3,5		1070	630	3,3	
75	0,3	1010	600	3,5		860	510	3,3	
100	0,4	780	460	3,4		660	390	3,3	
125	0,5	540	320	3,4		470	280	3,4	
150	0,6	330	190	3,5		180	110	3,6	
175	0,7	70	40	3,8		0	0	3,8	
200	0,8	0	0	3,8					



Weight: 1,2 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm