


12V DC		F03-12L8203-03S				Suction-Aspirante			
		F03-12L8203-03B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	2540	1500	13,7	0,0	2500	1480	13,1	0,0
50	0,2	2280	1350	14,5	16,8	2280	1350	14,1	17,3
100	0,4	1980	1170	15,5	27,3	1990	1170	15,1	28,2
150	0,6	1600	940	16,3	31,5	1570	930	16,0	31,5
200	0,8	1040	610	16,4	27,1	1040	610	17,0	26,1
250	1,0	720	420	17,0	22,6	650	380	17,1	20,3
300	1,2	450	270	17,6	16,4	350	210	17,2	13,0
350	1,4	180	110	18,4	7,3	130	80	18,3	5,3
400	1,6	0	0	19,3	0,0	0	0	19,4	0,0
ErP 2015 (2011/327/EC)									
RENDIMENTO - EFFICIENCY									
type	Pa	m3/h	A	kW	rpm	EFF.	r		
Suction	150	1600	16,3	0,21	2620	31,5%	1,0017		
Blowing	150	1570	16,0	0,21	2670	31,5%	1,0017		

24V DC		F03-24L8203-03S				Suction-Aspirante			
		F03-24L8203-03B				Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	2680	1580	7,2	0,0	2610	1540	6,9	0,0
50	0,2	2440	1440	7,7	16,9	2390	1410	7,3	17,5
100	0,4	2150	1270	8,1	28,4	2120	1250	7,8	29,0
150	0,6	1850	1090	8,5	34,9	1760	1040	8,3	34,0
200	0,8	1300	770	8,5	32,7	1210	710	8,8	29,4
250	1,0	900	530	8,7	27,6	860	510	8,9	25,8
300	1,2	630	370	9,0	22,4	500	300	9,0	17,8
350	1,4	380	220	9,3	15,3	260	150	9,3	10,5
400	1,6	140	80	9,8	6,1	80	50	9,9	3,5
450	1,8	0	0	10,1	0,0	0	0	10,1	0,0

ErP 2015 (2011/327/EC)							
RENDIMENTO - EFFICIENCY							
type	Pa	m3/h	A	kW	rpm	EFF.	r
Suction	150	1850	8,5	0,22	2780	34,9%	1,0018
Blowing	150	1760	8,3	0,22	2780	34,0%	1,0017

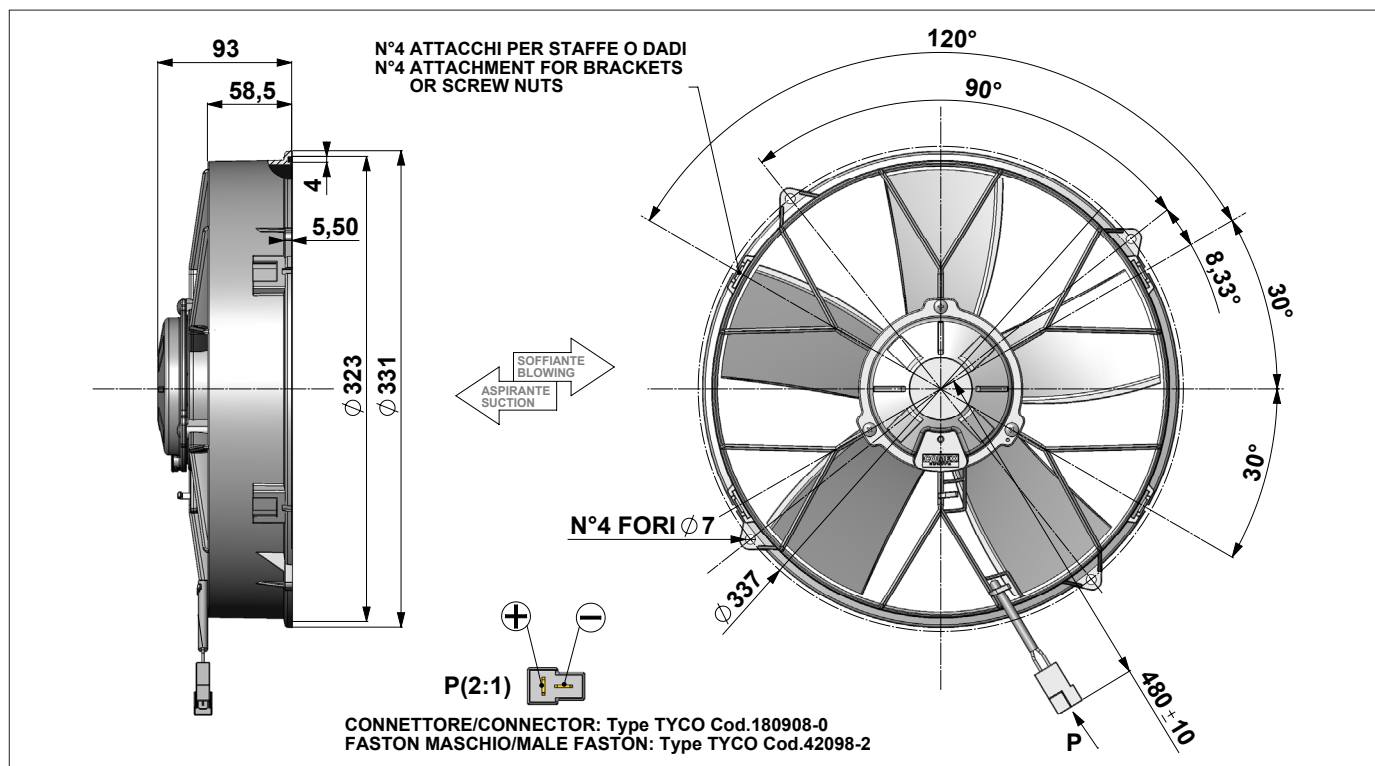

Weight: 2,5 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H ₂ O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m ³ /h = 0,59 cfm