


12V DC		F27P-12E8101-11S				Suction-Aspirante			
		F27P-12E8101-11B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	2140	1260	11,0		2120	1250	10,9	
25	0,1	1980	1170	11,3		1970	1160	11,1	
50	0,2	1800	1060	11,4		1810	1070	11,2	
75	0,3	1600	940	11,3		1580	930	11,2	
100	0,4	1360	800	11,0		1310	770	11,3	
125	0,5	1050	620	11,0		970	570	11,2	
150	0,6	750	440	11,1		600	350	11,2	
175	0,7	480	280	11,4		300	180	11,6	
200	0,8	131	80	12,3		0	0	12,5	
225	0,9	0	0	12,5					

24V DC		F27P-24E8101-11S				Suction-Aspirante			
		F27P-24E8101-11B				Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	2130	1260	5,4		2110	1240	5,3	
25	0,1	1960	1160	5,5		1950	1150	5,3	
50	0,2	1780	1050	5,5		1790	1060	5,4	
75	0,3	1580	930	5,5		1550	910	5,4	
100	0,4	1320	780	5,4		1270	750	5,4	
125	0,5	1010	600	5,4		930	550	5,4	
150	0,6	720	420	5,4		540	320	5,3	
175	0,7	460	270	5,6		310	180	5,6	
200	0,8	100	60	6,0		0	0	6,1	
225	0,9	0	0	6,0					

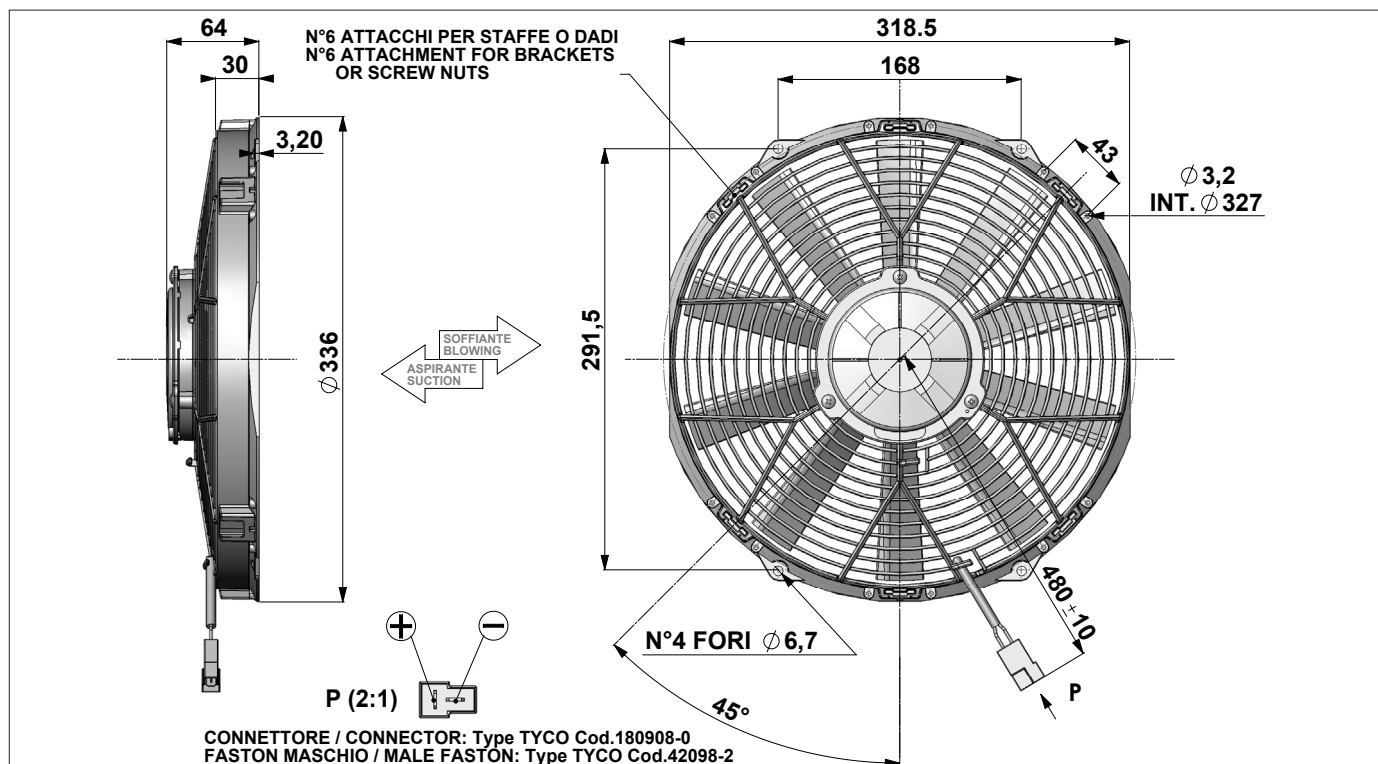

Weight: 1,7 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H ₂ O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m ³ /h = 0,59 cfm