
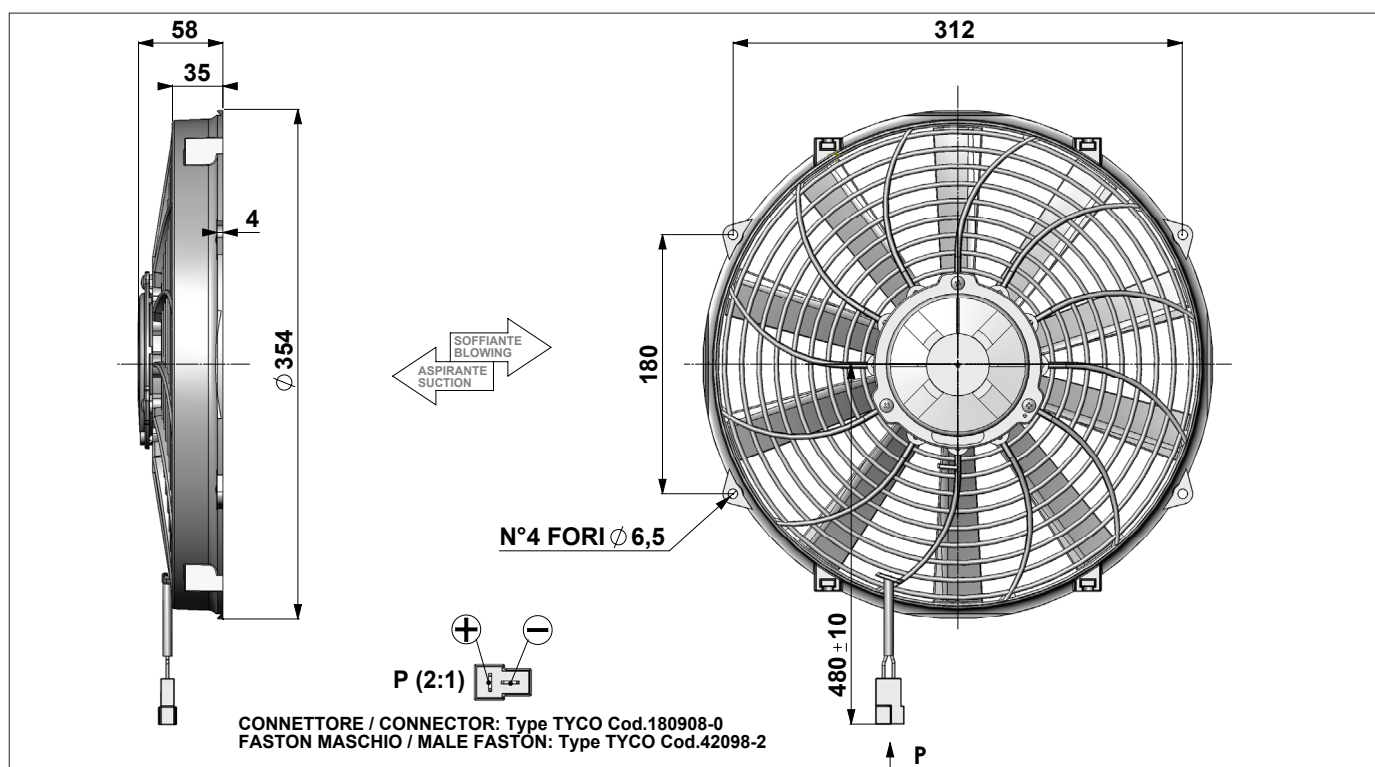


12V DC		F53-12E8003-28S				Suction-Aspirante			
		F53-12E8003-28B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	2020	1190	6,8		1910	1130	6,7	
25	0,1	1770	1040	7,0		1680	990	6,7	
50	0,2	1500	890	7,1		1300	770	6,8	
75	0,3	1100	650	6,9		860	510	6,7	
100	0,4	550	320	6,8		310	180	6,8	
125	0,5	50	30	7,5		0	0	7,3	
150	0,6	0	0	7,5					

24V DC		F53-24E8003-28S				Suction-Aspirante			
		F53-24E8003-28B				Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	2150	1270	3,8		1980	1170	3,6	
25	0,1	1910	1130	3,9		1780	1050	3,7	
50	0,2	1650	970	3,9		1490	880	3,7	
75	0,3	1270	750	3,8		1040	610	3,7	
100	0,4	680	400	3,7		490	290	3,6	
125	0,5	160	90	3,8		0	0	4,0	
150	0,6	0	0	4,2					



Weight: 1,4 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm