
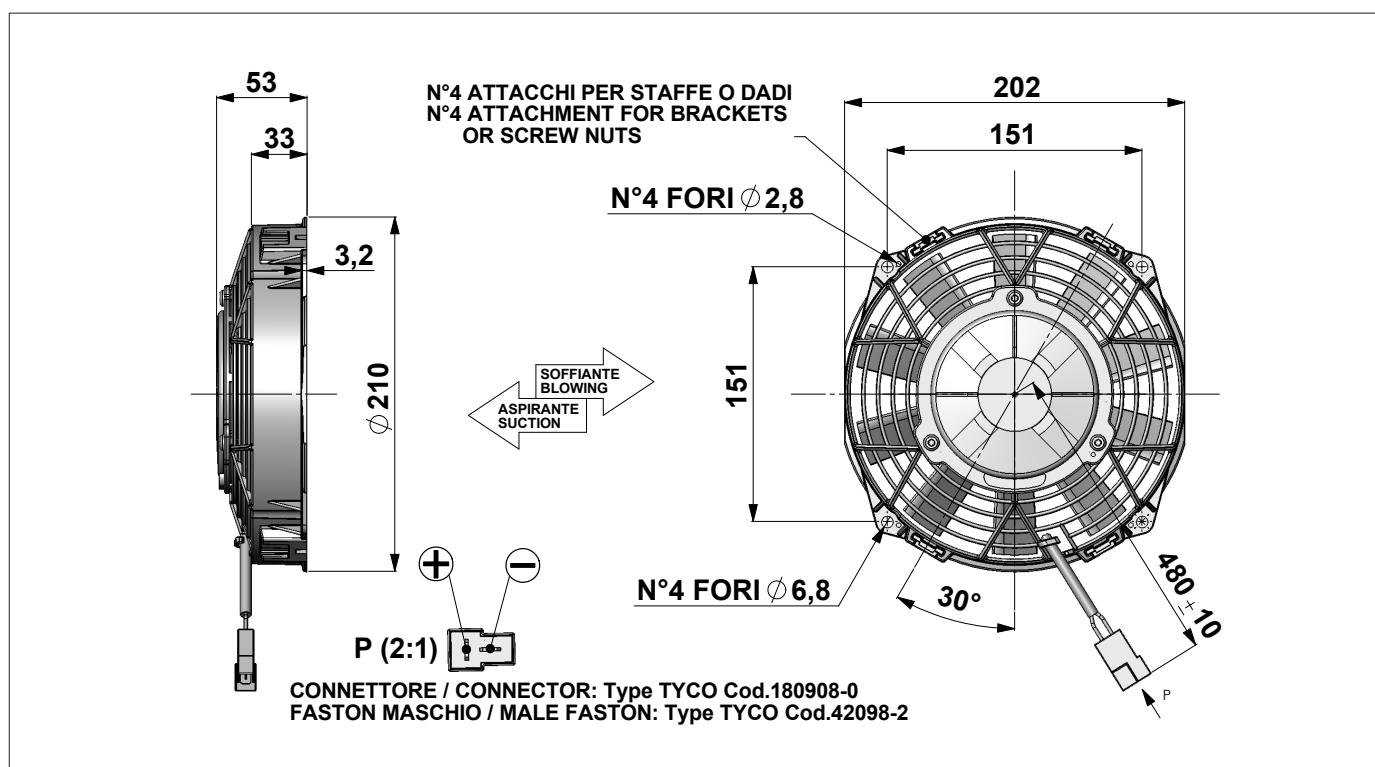


12V DC		F29P-12E8006-12S				Suction-Aspirante			
		F29P-12E8006-12B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	790	470	8,0		710	420	7,8	
25	0,1	720	420	8,0		660	390	7,8	
50	0,2	630	370	7,6		640	380	8,0	
75	0,3	530	310	7,3		590	350	7,9	
100	0,4	440	260	7,3		490	290	7,7	
125	0,5	420	250	7,6		370	220	7,9	
150	0,6	390	230	7,8		300	180	8,1	
175	0,7	350	210	8,2		260	150	8,3	
200	0,8	290	170	8,4		200	120	8,5	
225	0,9	240	140	8,5		120	70	8,6	
250	1,0	200	120	8,7		50	30	8,8	
300	1,2	100	60	9,0		0	0	9,0	
350	1,4	0	0	9,3					

24V DC		F29P-24E8006-12S				Suction-Aspirante			
		F29P-24E8006-12B				Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	820	480	4,3		730	430	4,0	
25	0,1	750	440	4,2		670	400	4,0	
50	0,2	660	390	4,1		630	370	4,0	
75	0,3	550	320	3,9		600	350	4,0	
100	0,4	460	270	3,8		510	300	3,9	
125	0,5	440	260	3,9		410	240	3,9	
150	0,6	410	240	4,1		320	190	4,0	
175	0,7	370	220	4,2		290	170	4,2	
200	0,8	320	190	4,3		240	140	4,3	
225	0,9	260	150	4,4		180	110	4,4	
250	1,0	220	130	4,4		110	60	4,5	
300	1,2	130	80	4,6		0	0	4,6	
350	1,4	0	0	4,8					



Weight: 1,1 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm