


12V DC		F54-12L8205/HT-26S				Suction-Aspirante			
		F54-12L8205/HT-26B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	2800	1650	14,1	0,0	2830	1670	13,4	0,0
50	0,2	2530	1490	15,5	17,4	2550	1500	14,6	18,7
100	0,4	2240	1320	16,5	29,0	2170	1280	16,0	29,0
150	0,6	1840	1090	17,3	34,1	1750	1030	17,3	32,4
200	0,8	1400	830	18,2	32,9	1280	760	18,6	29,4
250	1,0	920	540	18,7	26,3	820	480	19,3	22,7
300	1,2	580	340	19,4	19,2	420	250	19,6	13,7
350	1,4	280	170	20,0	10,5	130	80	20,1	4,8
400	1,6	0	0	20,7	0,0	0	0	20,5	0,0

ErP 2015 (2011/327/EC)							
RENDIMENTO - EFFICIENCY							
type	Pa	m3/h	A	kW	rpm	EFF.	r
Suction	175	1670	17,9	0,23	2360	34,8%	1,0018
Blowing	150	1750	17,3	0,22	2380	32,4%	1,0016

24V DC		F54-24L8205/HT-26S F54-24L8205/HT-26B				Suction-Aspirante Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	2920	1720	7,7	0,0	2970	1750	7,4	0,0
50	0,2	2660	1570	8,2	17,3	2690	1590	8,0	18,0
100	0,4	2390	1410	8,8	29,0	2340	1380	8,6	29,1
150	0,6	2020	1190	9,2	35,2	1930	1140	9,3	33,3
200	0,8	1640	970	9,6	36,5	1500	890	9,9	32,4
250	1,0	1090	640	9,8	29,7	1050	620	10,2	27,5
300	1,2	770	450	10,2	24,2	630	370	10,4	19,4
350	1,4	470	280	10,5	16,7	300	180	10,6	10,6
400	1,6	180	110	10,8	7,1	30	20	10,9	1,2
450	1,8	0	0	10,9	0,0	0	0	11,0	0,0

ErP 2015 (2011/327/EC)							
RENDIMENTO - EFFICIENCY							
type	Pa	m3/h	A	kW	rpm	EFF.	r
Suction	175	1860	9,4	0,24	2470	37,0%	1,0018
Blowing	175	1720	9,6	0,25	2470	33,6%	1,0018

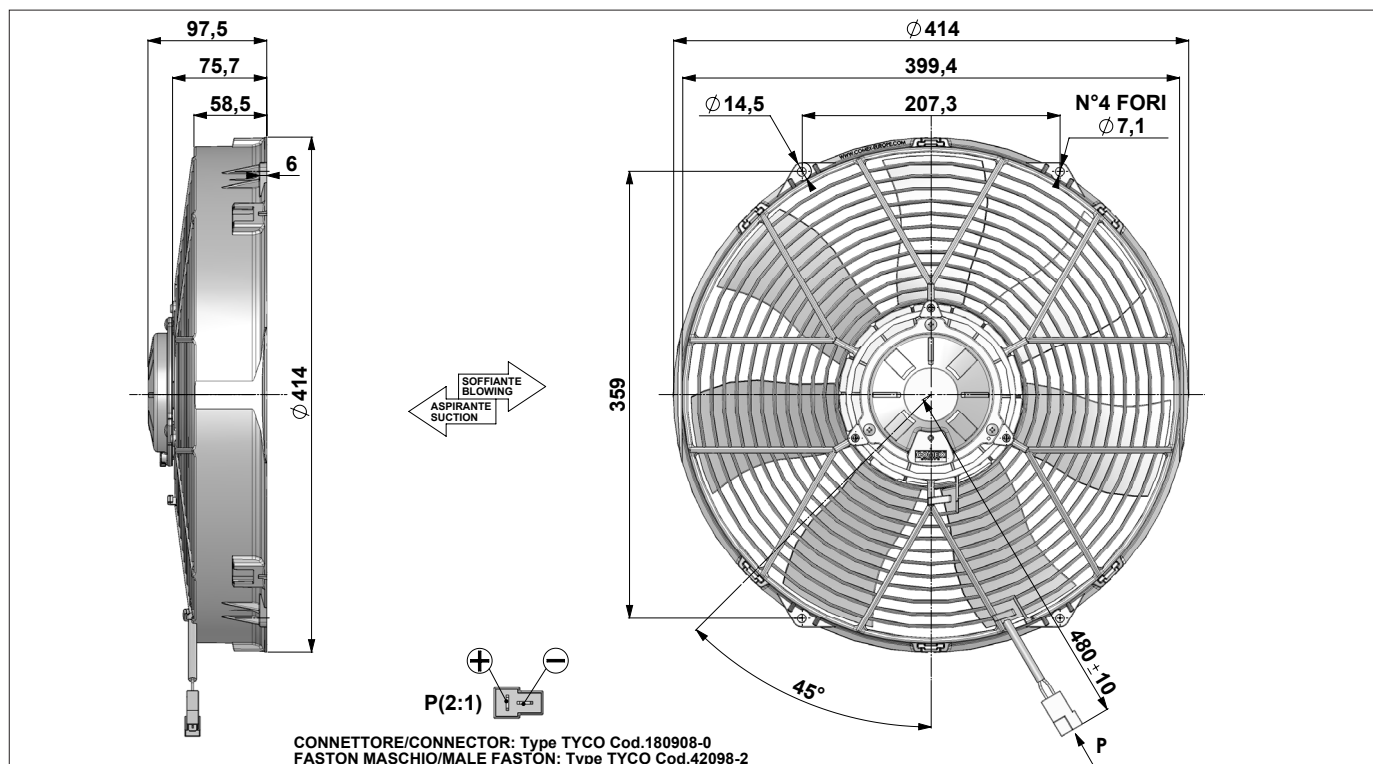

Weight: 2,9 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H ₂ O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m ³ /h = 0,59 cfm