


12V DC		F42-12E8103-18S				Suction-Aspirante			
		F42-12E8103-18B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	2540	<i>1500</i>	9,6	<i>0,0</i>	2300	<i>1360</i>	9,1	-
25	0,1	2320	<i>1370</i>	9,9	<i>12,5</i>	2110	<i>1240</i>	9,2	-
50	0,2	2070	<i>1220</i>	10,1	<i>21,9</i>	1870	<i>1100</i>	9,3	-
75	0,3	1790	<i>1060</i>	10,0	<i>28,7</i>	1490	<i>880</i>	9,4	-
100	0,4	1400	<i>830</i>	9,7	<i>30,8</i>	1030	<i>610</i>	9,4	-
125	0,5	790	<i>470</i>	9,6	<i>22,0</i>	500	<i>300</i>	9,4	-
150	0,6	390	<i>230</i>	9,9	<i>12,6</i>	80	<i>50</i>	10,0	-
175	0,7	90	<i>50</i>	10,6	<i>3,2</i>	0	<i>0</i>	10,2	-
200	0,8	0	<i>0</i>	10,8	<i>0,0</i>				
ErP 2015 (2011/327/EC)									
RENDIMENTO - EFFICIENCY									
type	Pa	m3/h	A	kW	rpm	EFF.	r		
Suction	100	1400	9,7	0,13	2020	30,8%	1,0011		
Blowing	-	-	-	-	-	-	-		

24V DC		F42-24E8103-18S				Suction-Aspirante			
		F42-24E8103-18B				Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	2590	1530	5,0	0,0	2410	1420	4,9	-
25	0,1	2360	1390	5,1	12,4	2240	1320	5,0	-
50	0,2	2130	1260	5,3	21,5	2030	1200	5,0	-
75	0,3	1880	1110	5,2	29,0	1690	1000	5,1	-
100	0,4	1540	910	5,2	31,6	1290	760	5,1	-
125	0,5	1080	640	5,1	28,3	780	460	5,0	-
150	0,6	630	370	5,2	19,4	330	190	5,2	-
175	0,7	50	30	5,5	1,7	30	20	5,5	-
200	0,8	0	0	5,7	0,0	0	0	5,7	-
ErP 2015 (2011/327/EC)									
RENDIMENTO - EFFICIENCY									
type	Pa	m3/h	A	kW	rpm	EFF.	r		
Suction	100	1540	5,2	0,14	2050	31,6%	1,0011		
Blowing	-	-	-	-	-	-	-		

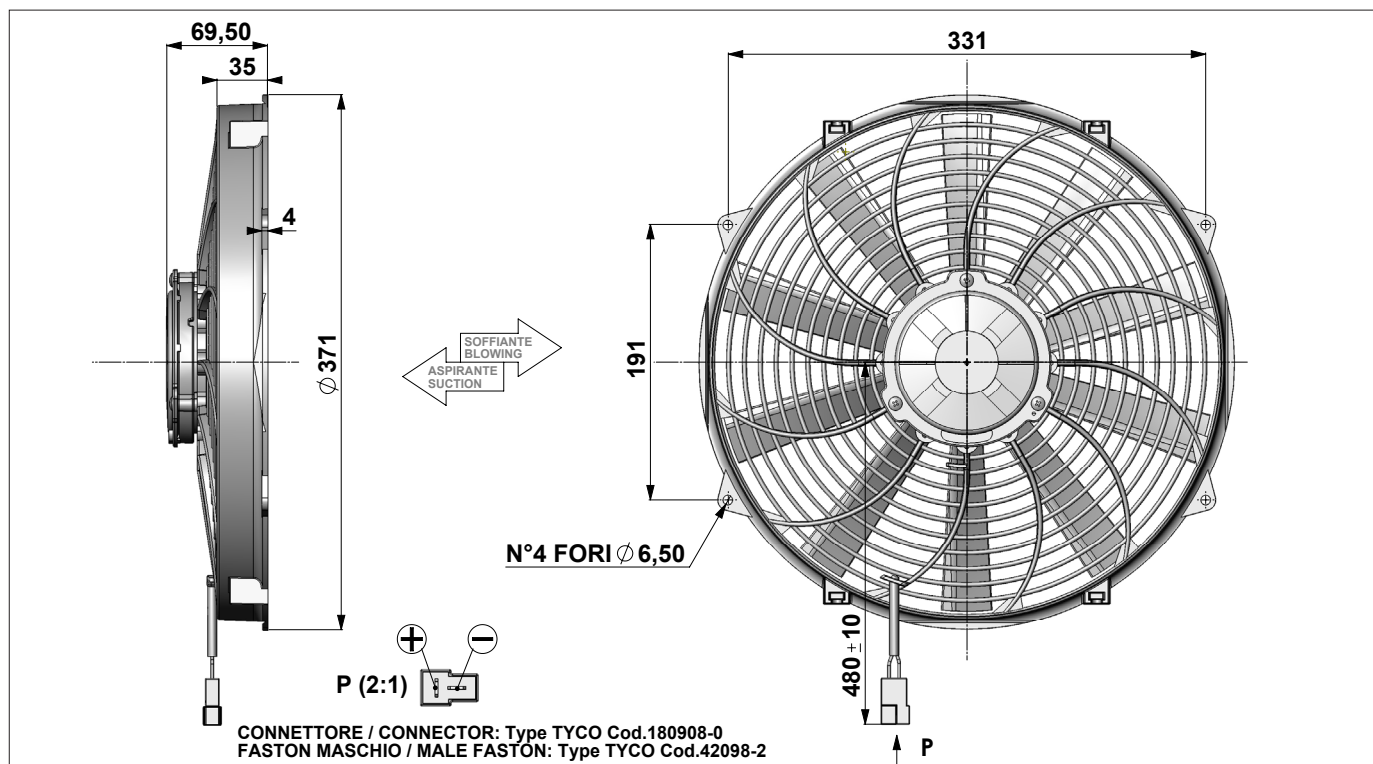

Weight: 1,9 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm