


12V DC		F31P-12E8102-13S				Suction-Aspirante			
		F31P-12E8102-13B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	1760	1040	11,8		1670	990	12,0	
25	0,1	1660	980	11,9		1560	920	12,1	
50	0,2	1570	930	12,1		1450	860	12,0	
75	0,3	1450	860	12,0		1330	780	12,0	
100	0,4	1330	780	12,1		1180	700	12,0	
125	0,5	1190	700	12,2		970	570	11,8	
150	0,6	990	580	11,9		800	470	11,7	
175	0,7	670	400	11,5		670	400	11,9	
200	0,8	550	320	11,9		480	280	11,7	
250	1,0	190	110	12,1		80	50	13,1	
300	1,2	0	0	13,9		0	0	13,7	

24V DC		F31P-24E8102-13S				Suction-Aspirante			
		F31P-24E8102-13B				Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	1820	1070	6,4		1690	1000	6,2	
25	0,1	1720	1010	6,4		1590	940	6,2	
50	0,2	1620	960	6,4		1480	870	6,1	
75	0,3	1510	890	6,4		1360	800	6,1	
100	0,4	1380	810	6,4		1220	720	6,1	
125	0,5	1230	730	6,3		1010	600	6,1	
150	0,6	1060	630	6,2		820	480	6,1	
175	0,7	800	470	6,1		710	420	6,1	
200	0,8	610	360	6,2		540	320	6,1	
250	1,0	270	160	6,5		120	70	6,6	
300	1,2	0	0	7,1		0	0	6,9	

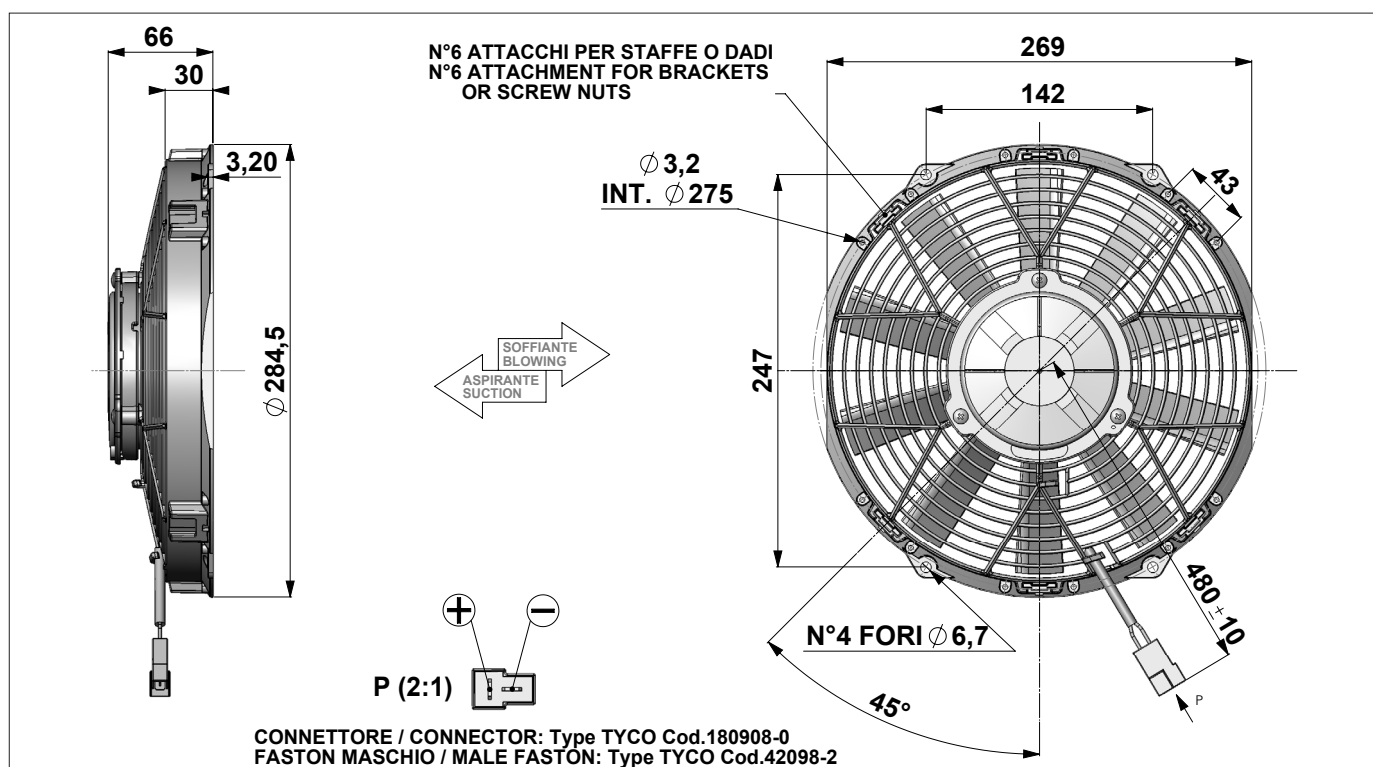

Weight: 1,6 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm