


12V DC		F26-12E8007-10S				Suction-Aspirante			
		F26-12E8007-10B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	1220	720	8,1		1070	630	7,5	
25	0,1	1140	670	8,1		980	580	7,4	
50	0,2	1040	610	8,0		890	530	7,4	
75	0,3	930	550	7,9		780	460	7,4	
100	0,4	780	460	7,7		630	370	7,4	
125	0,5	620	370	7,8		500	300	7,6	
150	0,6	490	290	8,0		410	240	7,7	
175	0,7	400	240	8,1		290	170	7,9	
200	0,8	300	180	8,3		140	80	8,4	
225	0,9	150	90	8,8		0	0	8,7	
250	1,0	0	0	9,0					

24V DC		F26-24E8007-10S				Suction-Aspirante			
		F26-24E8007-10B				Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	1240	730	4,2		1090	640	3,8	
25	0,1	1160	680	4,2		1000	590	3,8	
50	0,2	1070	630	4,2		910	540	3,8	
75	0,3	970	570	4,1		810	480	3,8	
100	0,4	830	490	4,0		670	400	3,8	
125	0,5	660	390	3,9		540	320	3,9	
150	0,6	540	320	4,1		420	250	4,0	
175	0,7	450	270	4,2		290	170	4,1	
200	0,8	350	210	4,2		170	100	4,3	
225	0,9	230	140	4,4		0	0	4,5	
250	1,0	0	0	4,7					

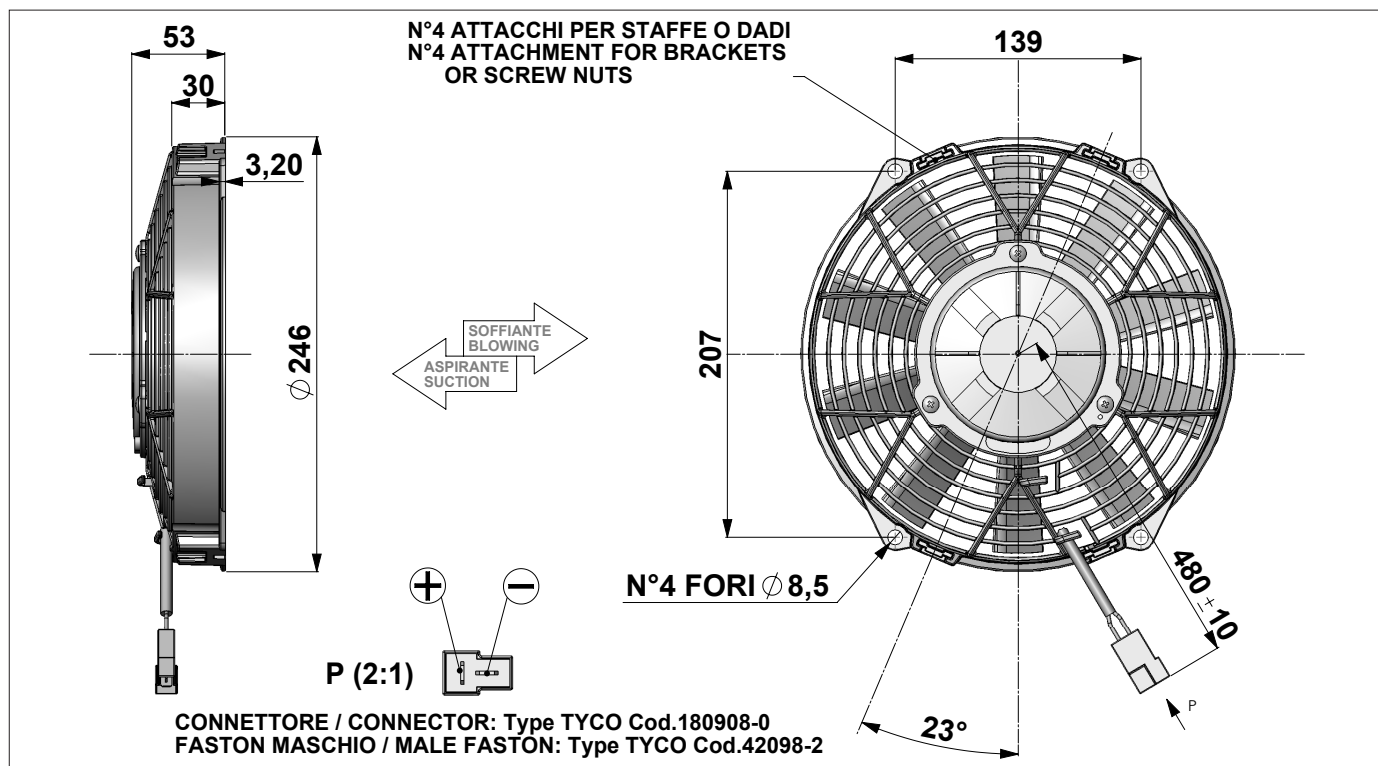

Weight: 1,1 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm