


12V DC		F30P-12L8204-08S F30P-12L8204-08B				Suction-Aspirante Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	3670	<i>2170</i>	17,0	<i>0,0</i>	3660	<i>2160</i>	17,6	<i>0,0</i>
25	0,1	3450	<i>2040</i>	17,4	<i>10,6</i>	3440	<i>2030</i>	17,7	<i>10,4</i>
50	0,2	3220	<i>1900</i>	18,1	<i>19,0</i>	3220	<i>1900</i>	18,1	<i>19,0</i>
75	0,3	2990	<i>1760</i>	18,6	<i>25,8</i>	2980	<i>1760</i>	18,6	<i>25,7</i>
100	0,4	2710	<i>1600</i>	18,8	<i>30,8</i>	2610	<i>1540</i>	18,7	<i>29,8</i>
125	0,5	2380	<i>1400</i>	18,7	<i>34,0</i>	2150	<i>1270</i>	18,8	<i>30,5</i>
150	0,6	1910	<i>1130</i>	18,5	<i>33,1</i>	1540	<i>910</i>	18,8	<i>26,3</i>
175	0,7	1290	<i>760</i>	18,2	<i>26,5</i>	960	<i>570</i>	18,3	<i>19,6</i>
200	0,8	790	<i>470</i>	18,2	<i>18,5</i>	490	<i>290</i>	18,7	<i>11,2</i>
225	0,9	250	<i>150</i>	18,4	<i>6,5</i>	40	<i>20</i>	19,0	<i>1,0</i>
250	1,0	0	<i>0</i>	18,5	<i>0,0</i>	0	<i>0</i>	19,3	<i>0,0</i>

ErP 2015 (2011/327/EC)							
RENDIMENTO - EFFICIENCY							
type	Pa	m3/h	A	kW	rpm	EFF.	r
Suction	125	2380	18,7	0,24	2240	34,0%	1,0014
Blowing	125	2150	18,8	0,24	2260	30,5%	1,0014

24V DC		F30P-24L8204-08S F30P-24L8204-08B				Suction-Aspirante Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	3580	2110	7,6	0,0	3450	2040	7,5	0,0
25	0,1	3330	1960	7,8	11,4	3250	1920	7,6	11,4
50	0,2	3080	1820	8,0	20,6	3010	1780	7,8	20,6
75	0,3	2830	1670	8,2	27,7	2740	1620	7,9	27,8
100	0,4	2530	1490	8,3	32,6	2280	1350	8,0	30,4
125	0,5	2130	1260	8,2	34,7	1710	1010	8,0	28,5
150	0,6	1450	860	7,9	29,4	1110	650	7,8	22,8
175	0,7	890	530	7,9	21,1	570	340	7,9	13,5
200	0,8	510	300	8,0	13,6	120	70	8,1	3,2
225	0,9	120	70	8,3	3,5	0	0	8,3	0,0
250	1,0	0	0	8,5	0,0				

ErP 2015 (2011/327/EC)							
RENDIMENTO - EFFICIENCY							
type	Pa	m3/h	A	kW	rpm	EFF.	r
Suction	125	2130	8,2	0,21	2180	34,7%	1,0014
Blowing	100	2280	8,0	0,21	2180	30,4%	1,0012

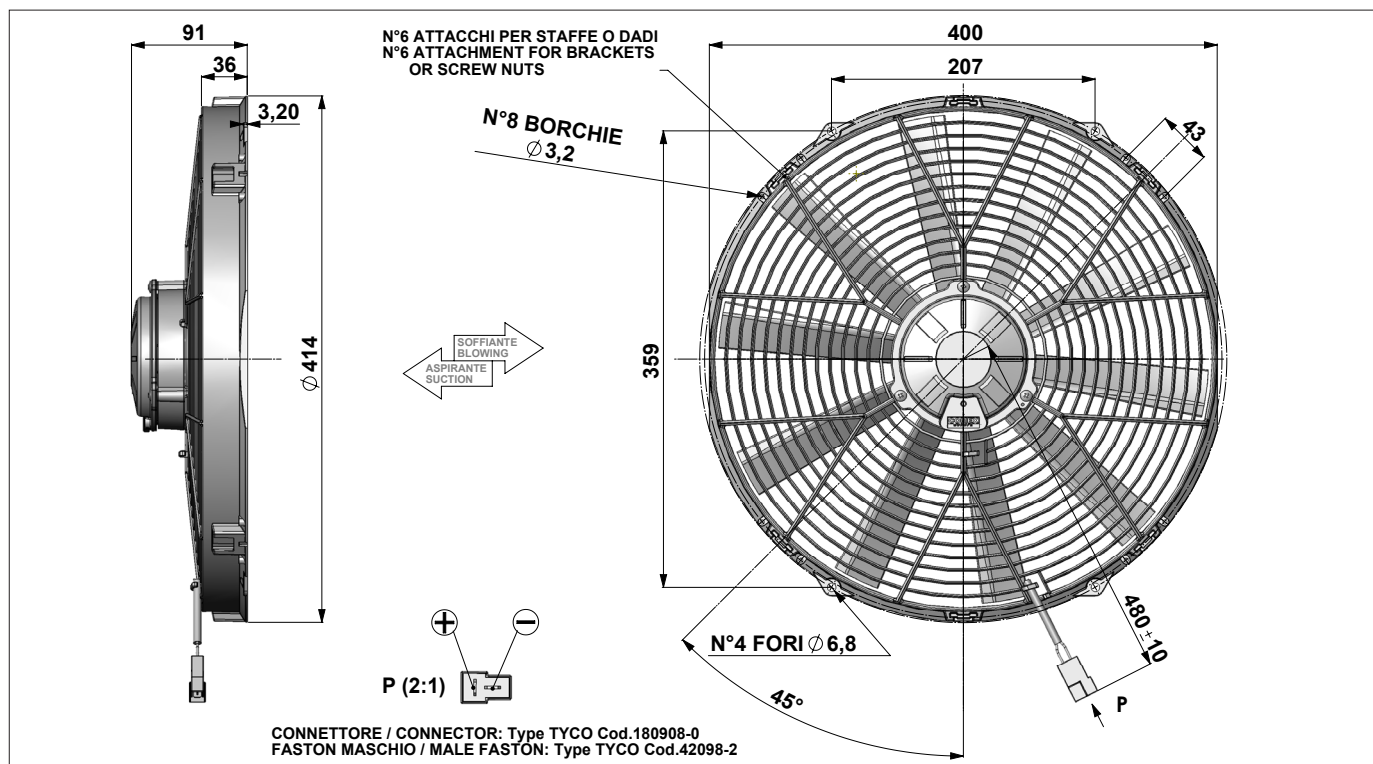

Weight: 2,6 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H ₂ O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m ³ /h = 0,59 cfm