


12V DC		F30P-12EL8103/HT-08S F30P-12EL8103/HT-08B				Suction-Aspirante Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	3030	<i>1790</i>	9,9	<i>0,0</i>	2920	<i>1720</i>	9,5	<i>0,0</i>
25	0,1	2720	<i>1600</i>	10,1	<i>14,4</i>	2650	<i>1560</i>	9,7	<i>14,6</i>
50	0,2	2400	<i>1420</i>	10,5	<i>24,4</i>	2340	<i>1380</i>	9,9	<i>25,3</i>
75	0,3	2020	<i>1190</i>	10,4	<i>31,1</i>	1820	<i>1070</i>	9,9	<i>29,5</i>
100	0,4	1480	<i>870</i>	10,2	<i>31,0</i>	1150	<i>680</i>	9,9	<i>24,8</i>
125	0,5	840	<i>500</i>	10,1	<i>22,2</i>	490	<i>290</i>	9,7	<i>13,5</i>
150	0,6	260	<i>150</i>	10,2	<i>8,2</i>	90	<i>50</i>	9,8	<i>2,9</i>
175	0,7	0	<i>0</i>	10,6	<i>0,0</i>	0	<i>0</i>	10,3	<i>0,0</i>
ErP 2015 (2011/327/EC)									
RENDIMENTO - EFFICIENCY									
type	Pa	m3/h	A	kW	rpm	EFF.	r		
Suction	75	2020	10,4	0,14	1860	31,1%	1,0009		
Blowing	75	1820	9,9	0,13	1880	29,5%	1,0008		

24V DC		F30P-24EL8103/HT-08S F30P-24EL8103/HT-08B				Suction-Aspirante Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	3130	1850	5,3	0,0	3040	1790	5,1	0,0
25	0,1	2860	1690	5,4	14,1	2790	1650	5,3	14,1
50	0,2	2550	1500	5,6	24,3	2480	1460	5,4	24,5
75	0,3	2210	1300	5,6	31,6	2030	1200	5,4	30,1
100	0,4	1770	1040	5,6	33,8	1420	840	5,5	27,6
125	0,5	980	580	5,3	24,7	780	460	5,3	19,7
150	0,6	500	300	5,4	14,8	250	150	5,4	7,4
175	0,7	0	0	5,7	0,0	0	0	5,6	0,0
ErP 2015 (2011/327/EC)									
RENDIMENTO - EFFICIENCY									
type	Pa	m3/h	A	kW	rpm	EFF.	r		
Suction	100	1770	5,6	0,15	1930	33,8%	1,0011		
Blowing	75	2030	5,4	0,14	1950	30,1%	1,0009		

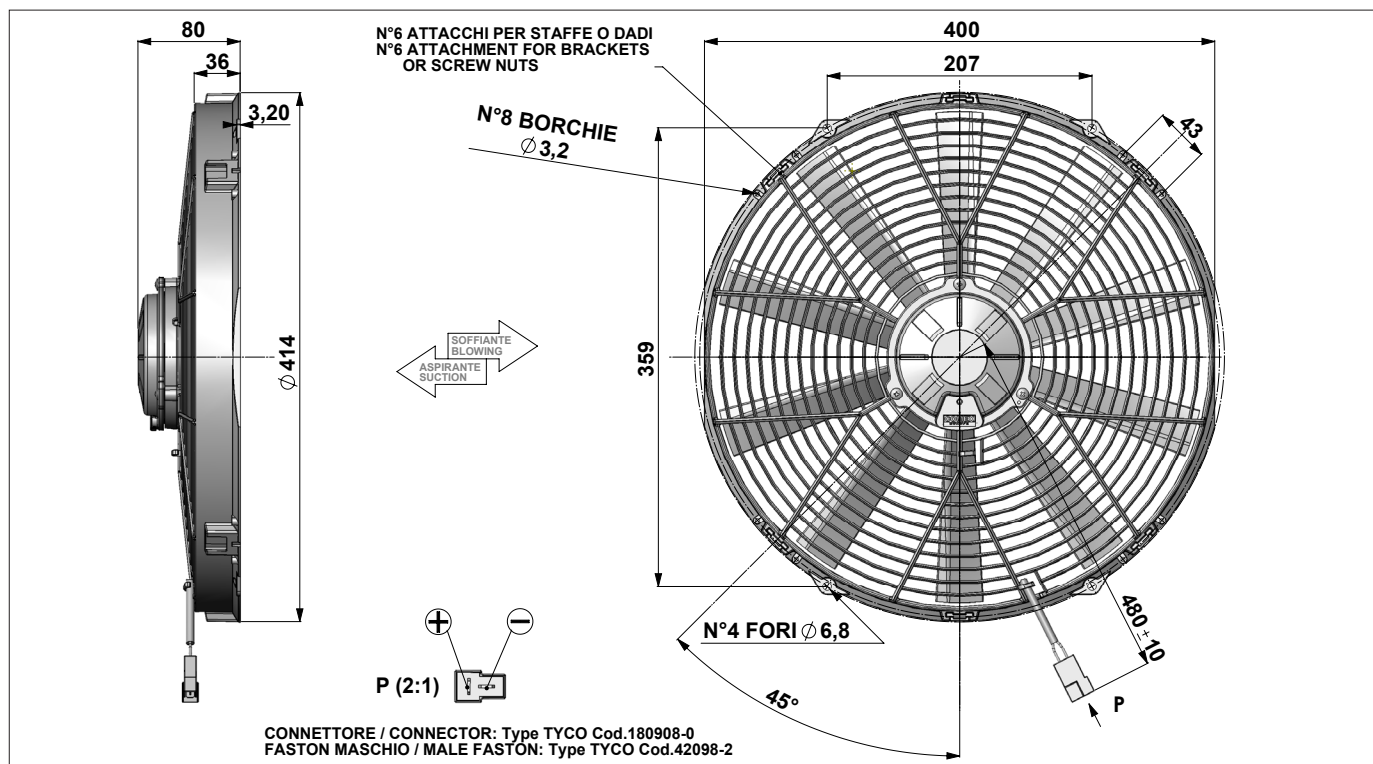

Weight: 2,2 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H ₂ O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m ³ /h = 0,59 cfm