
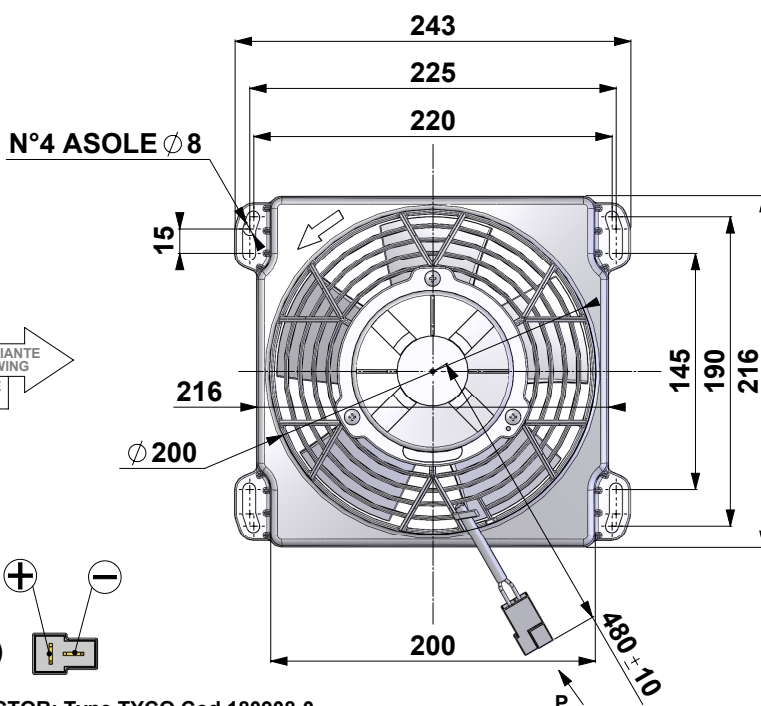



12V DC		F44-12E8006-21S				Suction-Aspirante			
		F44-12E8006-21B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	820	480	6,5		680	400	6,6	
25	0,1	790	470	6,6		650	380	6,7	
50	0,2	760	450	6,8		640	380	6,6	
75	0,3	720	420	6,9		590	350	6,7	
100	0,4	680	400	7,1		550	320	6,7	
150	0,6	570	340	7,1		420	250	6,8	
200	0,8	470	280	7,3		340	200	7,1	
250	1,0	310	180	7,4		250	150	7,5	
300	1,2	190	110	7,6		190	110	8,0	
350	1,4	100	60	8,1		120	70	8,5	
400	1,6	0	0	8,5		40	20	9,0	
						0	0	9,3	

24V DC		F44-24E8006-21S				Suction-Aspirante			
		F44-24E8006-21B				Blowing-Soffiante			
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	820	480	3,1		690	410	3,4	
25	0,1	790	470	3,2		660	390	3,4	
50	0,2	760	450	3,3		640	380	3,5	
75	0,3	730	430	3,4		610	360	3,4	
100	0,4	690	410	3,4		560	330	3,5	
150	0,6	590	350	3,5		450	270	3,5	
200	0,8	490	290	3,6		360	210	3,6	
250	1,0	340	200	3,6		270	160	3,7	
300	1,2	220	130	3,8		210	120	4,0	
350	1,4	120	70	3,9		150	90	4,3	
400	1,6	40	20	4,2		70	40	4,5	
450	1,8	0	0	4,2		0	0	4,7	

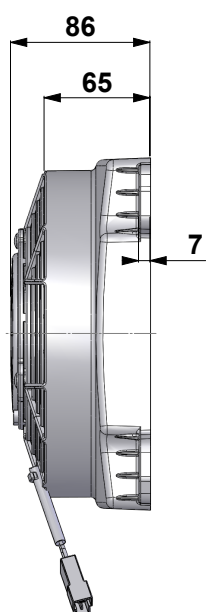

CONNETTORE/CONNECTOR: Type TYCO Cod.180908-0
FASTON MASCHIO/MALE FASTON: Type TYCO Cod.42098-2

Weight: 1,2 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm