
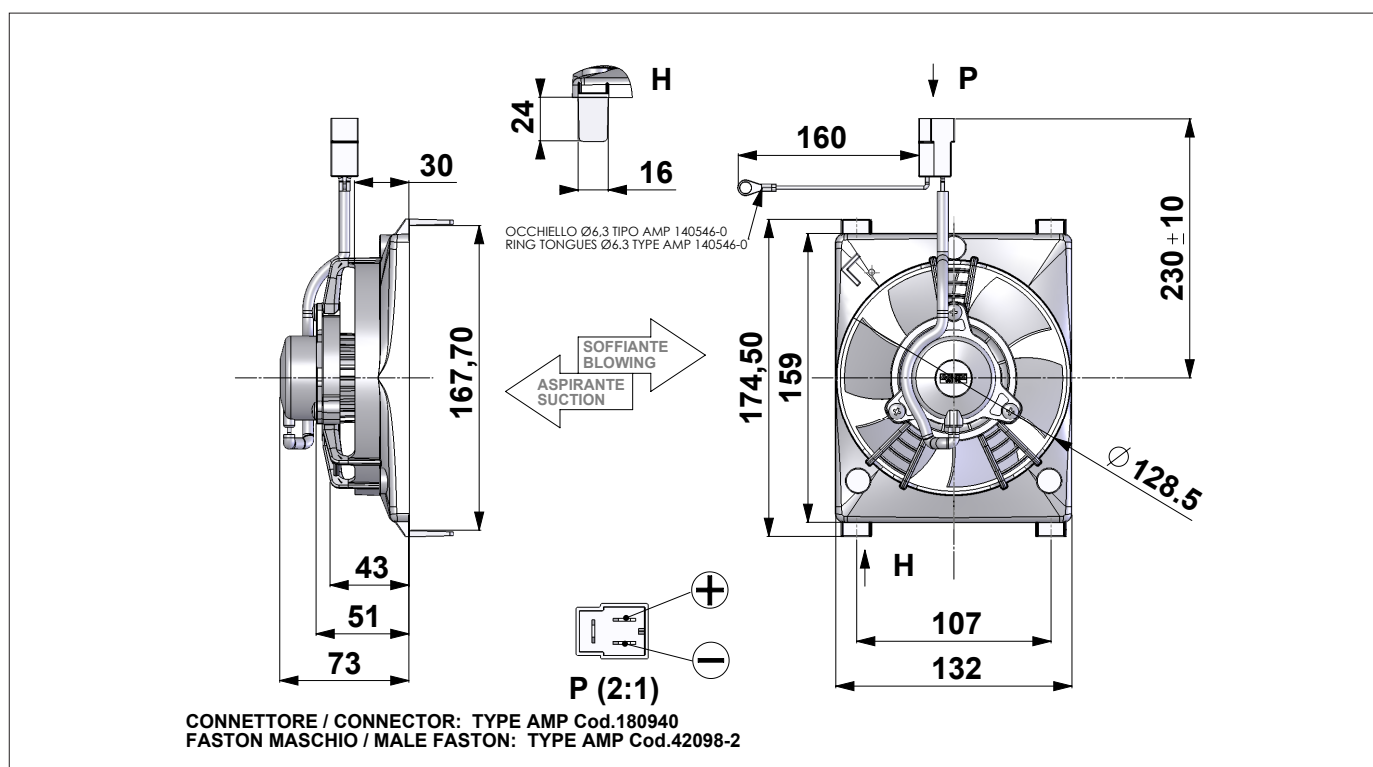


12V DC		F13-12C004-07S F13-12C004-07B				Suction-Aspirante Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	390	230	2,8		310	180	2,6	
25	0,1	370	220	2,9		290	170	2,6	
50	0,2	340	200	3,0		270	160	2,6	
75	0,3	310	180	3,0		250	150	2,6	
100	0,4	270	160	2,9		220	130	2,6	
125	0,5	220	130	2,8		180	110	2,7	
150	0,6	170	100	3,0		130	80	3,0	
175	0,7	110	60	3,0		90	50	3,0	
200	0,8	60	40	3,2		60	40	3,3	
225	0,9	30	20	3,3		20	10	3,5	
250	1,0	0	0	3,4		0	0	3,6	

24V DC									
Test Voltage: 26,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0								
25	0,1								
50	0,2								
75	0,3								
100	0,4								
125	0,5								
150	0,6								
175	0,7								
200	0,8								
225	0,9								
250	1,0								



Weight: 0,4 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm