
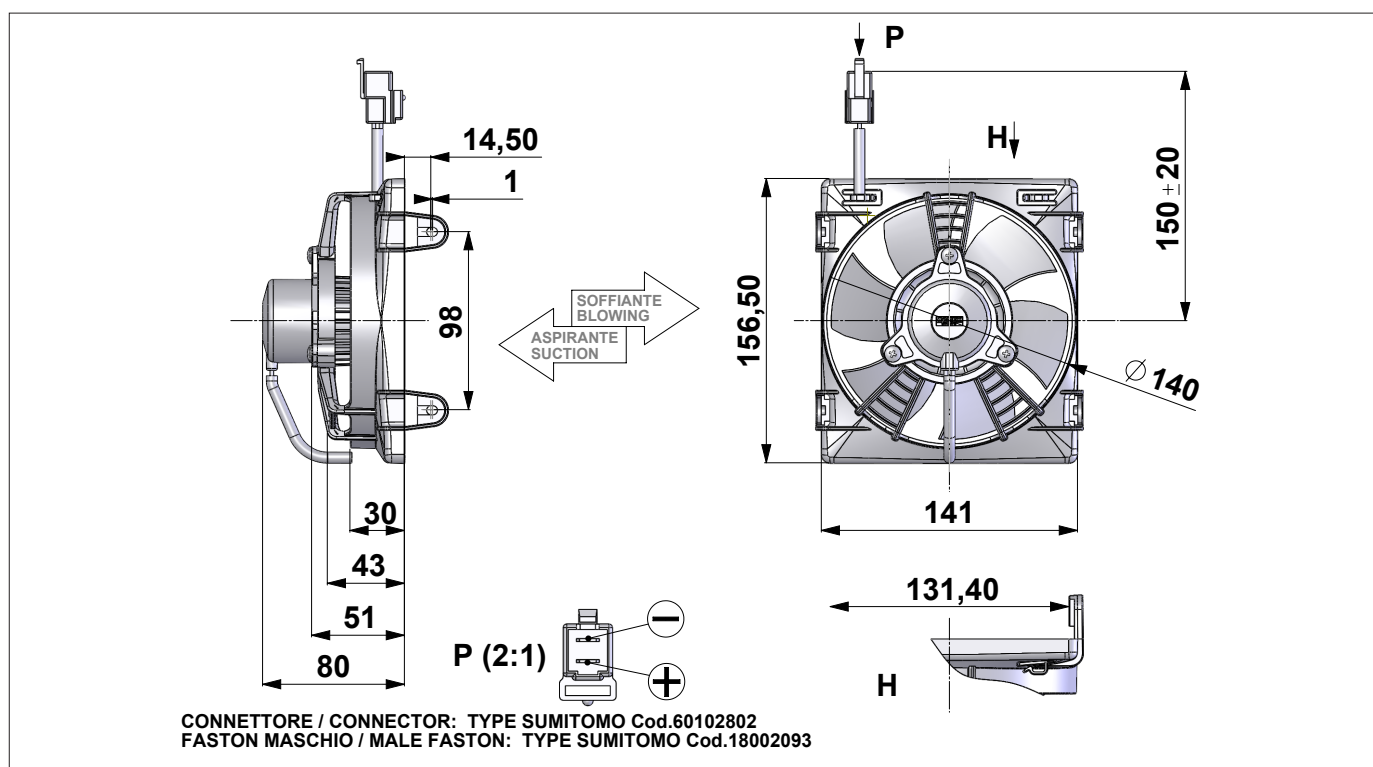


12V DC		F17-12C001-01S F17-12C001-01B				Suction-Aspirante Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	470	280	2,3		480	280	2,5	
25	0,1	440	260	2,4		430	250	2,5	
50	0,2	420	250	2,5		370	220	2,5	
75	0,3	380	220	2,6		330	190	2,5	
100	0,4	290	170	2,6		270	160	2,6	
125	0,5	240	140	2,8		170	100	2,8	
150	0,6	180	110	2,9		120	70	2,9	
175	0,7	130	80	3,0		80	50	2,9	
200	0,8	70	40	3,1		50	30	3,0	
225	0,9	40	20	3,2		20	10	3,1	
250	1,0	0	0	3,3		0	0	3,2	

24V DC		Test Voltage: 26,0 VOLT DC							
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0								
25	0,1								
50	0,2								
75	0,3								
100	0,4								
125	0,5								
150	0,6								
175	0,7								
200	0,8								
225	0,9								
250	1,0								



Weight: 0,4 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm