
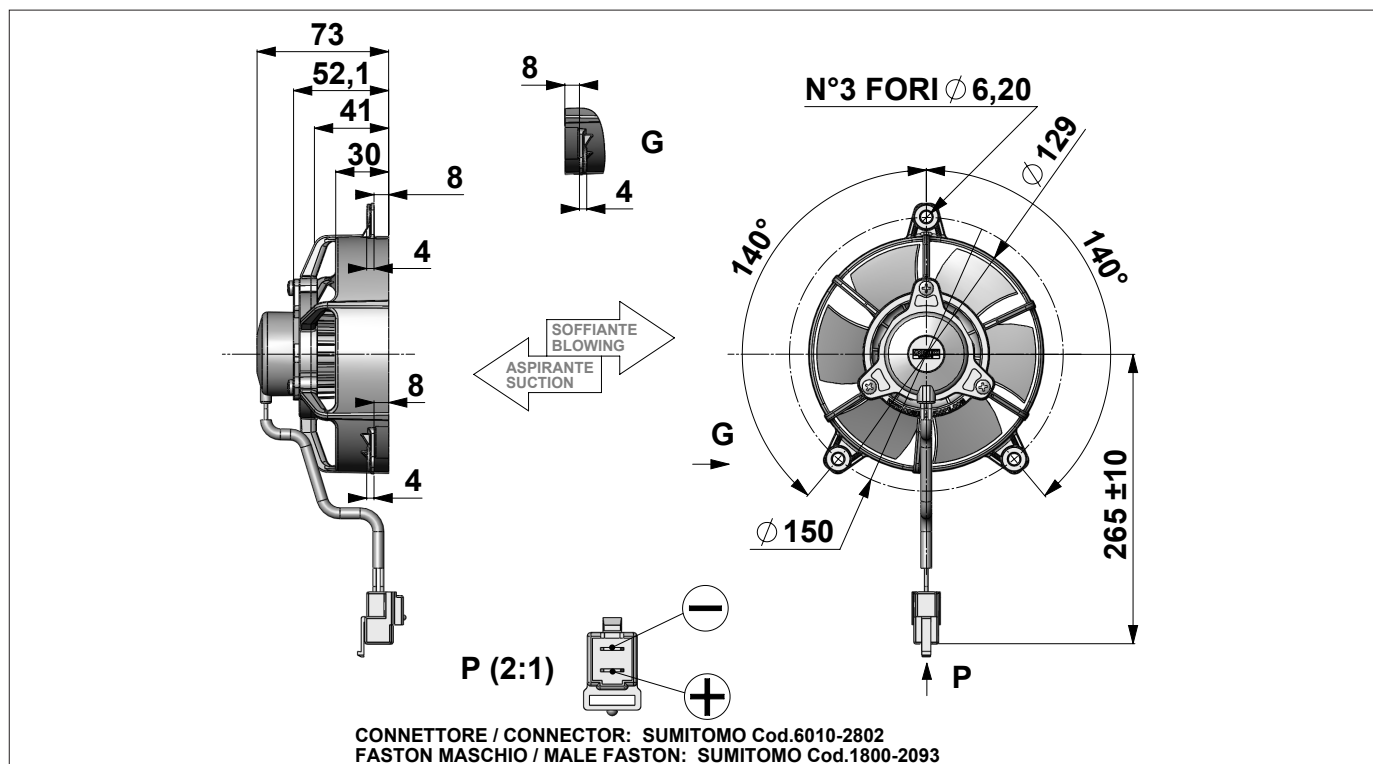


12V DC		F32-12C004-07S				Suction-Aspirante			
		F32-12C004-07B				Blowing-Soffiante			
Test Voltage: 13,0 VOLT DC									
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0	380	220	2,5		360	210	2,4	
25	0,1	360	210	2,6		330	190	2,5	
50	0,2	330	190	2,6		280	170	2,4	
75	0,3	290	170	2,7		230	140	2,5	
100	0,4	240	140	2,7		180	110	2,5	
125	0,5	180	110	2,7		120	70	2,8	
150	0,6	150	90	2,9		80	50	2,8	
175	0,7	110	60	3,0		50	30	3,0	
200	0,8	90	50	3,1		20	10	3,2	
225	0,9	60	40	3,1		0	0	3,2	
250	1,0	30	20	3,2					
300	1,2	0	0	3,4					

24V DC		Test Voltage: 26,0 VOLT DC							
Static Pressure		SUCTION Aspirante				BLOWING Soffiante			
Pa	IN H2O	Airflow m³/h	Airflow cfm	Current A	Eff. %	Airflow m³/h	Airflow cfm	Current A	Eff. %
0	0								
25	0,1								
50	0,2								
75	0,3								
100	0,4								
125	0,5								
150	0,6								
175	0,7								
200	0,8								
225	0,9								
250	1,0								
300	1,2								



Weight: 0,4 Kg	Noise: LOW NOISE
Pressure rate: 1Pa = 0,004 inch H2O	Static Pressure: pascal (Pa)
Dimensions rate: 25,4 mm = 1 inch	Airflow rate: 1 m³/h = 0,59 cfm