

12V	90050208	90050268
D.C. - C.C.	Puller - Aspirante	Pusher - Soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
mm H ₂ O	m ³ /h	A	m ³ /h	A
0,0	1404	8,6	1391	8,6
2,5	1252	8,7	1303	8,9
5,0	1123	8,8	1220	9,0
7,5	989	9,0	1127	9,1
10,0	842	8,6	1025	9,3
12,5	717	8,6	894	9,5
15,0	554	9,1	705	9,8
17,5	427	9,5	533	9,8
20,0	280	9,6	156	9,9
22,5				
25				

Test voltage 13V D.C. - Tensione di prova 13V C.C.


24V	90050210	90050211
D.C. - C.C.	Puller - Aspirante	Pusher - Soffiante

Static Pressure Pressione Statica	Airflow Portata	Current Corrente	Airflow Portata	Current Corrente
in H ₂ O	m ³ /h	A	m ³ /h	A
0	1477	4,5	1374	4,4
0,1	1337	4,6	1283	4,5
0,2	1196	4,7	1200	4,7
0,3	1065	4,7	1132	4,8
0,4	943	4,7	1059	4,9
0,5	809	4,7	918	5,0
0,6	630	4,8	734	5,2
0,7	484	4,9	561	5,4
0,8	363	5,1	260	5,2
0,9	270	5,1		
1	177	5,2		

Test voltage 26V D.C. - Tensione di prova 26V C.C.

Airflow - Portata d'aria : 1 m³/h = 0,59 cfm

- Static pressure - Pressione : 1 mmH₂O = 0,04inch H₂O - 1 mmH₂O = 9,81 Pa

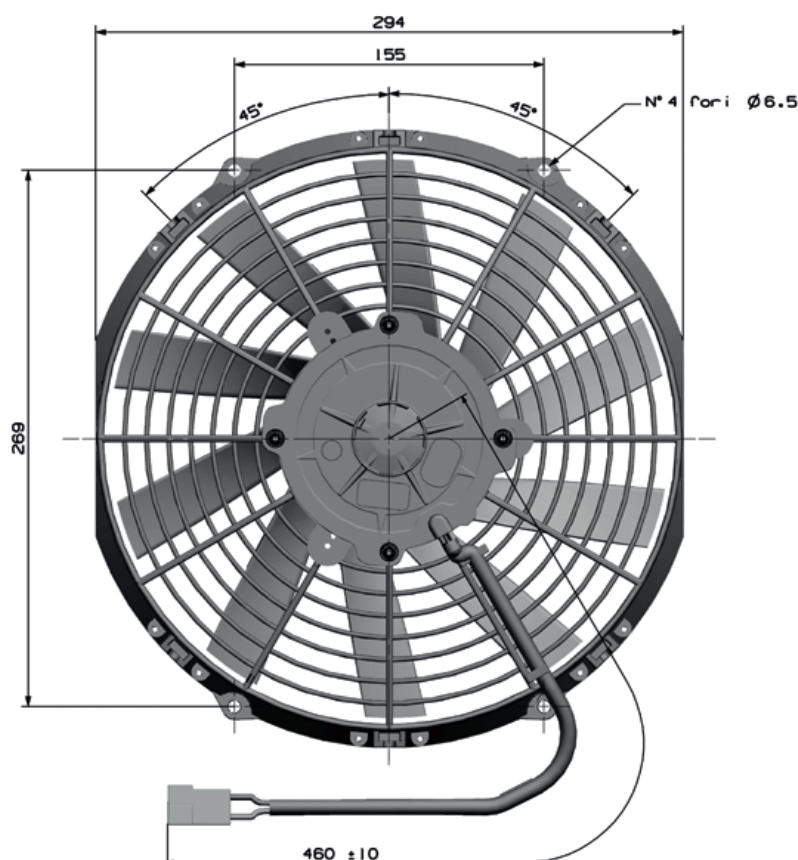

Waterproof Motor IP68

Motore stagno IP68

AMP Connector: 180908

Connettore AMP : 180908

Available with other connectors

Disponibile con altri connettori

